

# S

Scandinavian



# O

light reimaged

# L

### SOL lighting series

- A minimalist lighting collection inspired by the Nordic sun
- Adjustable light - from soft ambient to focused illumination
- Available as pendant, floor lamp, and portable version
- Designed for both residential and hospitality use
- Rechargeable option for flexible placement
- Designed for SAS in 2025 by Pernille Norman Rindom and ROTation.

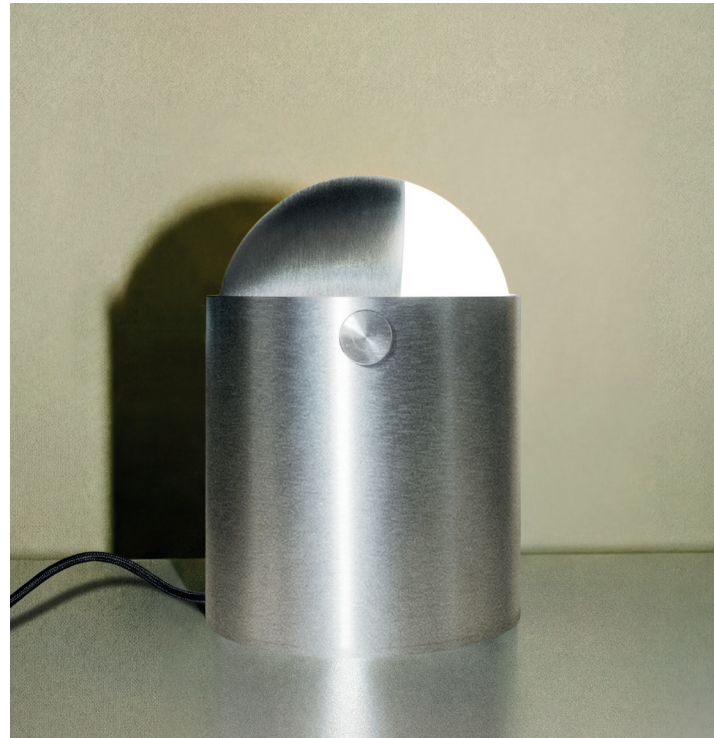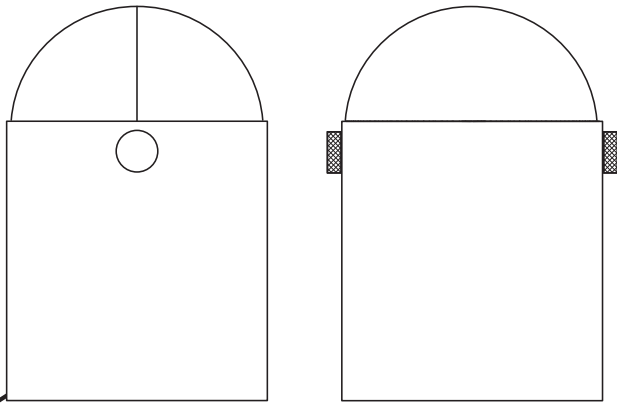

<b>Type</b>	Floor lamp
-------------	------------

<b>Lamp structure</b>	Housing material:	Aluminum body + PC cover
	Color:	Raw aluminium
	Protection:	Ip20
	Dimension:	Ø240xH322mm
	Beam Angle:	120°

<b>Electronical</b>	Available output:	210lm
	Available CCT:	Kelvin 2700K as standard Option 3000, 3500, 4000K
	Dimming option:	Standard Triac
	Input:	AC220-240V
	Driver type:	200mA
	Driver included:	Yes

<b>Others</b>	Tilting angle:	No
	Rotation angle:	No
	Warranty	
	(Mod./driv.):	2 years

<b>LED specifications</b>	LED chip:	Bridgelux
	Power:	7w
	Lum. flux:	210 lm
	Efficiency:	30 lm/w
	Color rendering:	Ra95
	CCT:	2700K-4000K
	Avg. lifetime:	10.000h



© ROTation, Denmark  
Made in China  
[rotationcph.com/sol](http://rotationcph.com/sol)




# S

Scandinavian

# O

light reimaged

# L

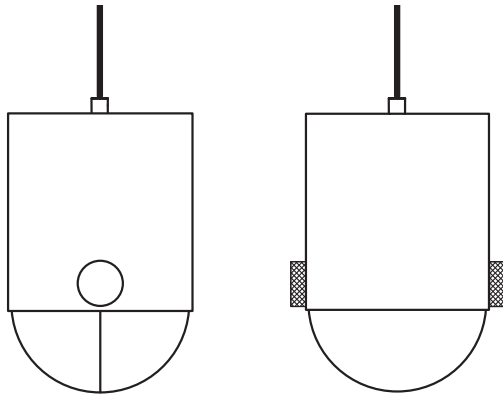

### SOL lighting series

- A minimalist lighting collection inspired by the Nordic sun
- Adjustable light - from soft ambient to focused illumination
- Available as pendant, floor lamp, and portable version
- Designed for both residential and hospitality use
- Rechargeable option for flexible placement
- Designed for SAS in 2025 by Pernille Norman Rindom and ROTation.



<b>Type</b>	Pendant
-------------	---------

<b>Lamp structure</b>	Housing material:	Aluminum body + PC cover
	Color:	Raw aluminium
	Protection:	Ip20
	Dimension:	Ø120xH160mm
	Beam Angle:	120°

<b>Others</b>	Tilting angle:	No
	Rotation angle:	No
	Warranty	
	(Mod./driv.):	2 years

<b>Electronical</b>	Available output:	210lm
	Available CCT:	Kelvin 2700K as standard Option 3000, 3500, 4000K
	Dimming option:	Standard Triac
	Input:	AC220-240V
	Driver type:	200mA
	Driver included:	Yes

<b>LED specifications</b>	LED chip:	Bridgelux
	Power:	7w
	Lum. flux:	210 lm
	Efficiency:	30 lm/w
	Color rendering:	Ra95
	CCT:	2700K-4000K
	Avg. lifetime:	50.000h



© ROTation, Denmark  
Made in China  
[rotationcph.com/sol](http://rotationcph.com/sol)



